



EinScan H2

High Texture Resolution Handheld 3D Scanner

Hybrid LED & Infrared Light Source







The EinScan H2 improves on its predecessor with a 5MP resolution texture camera, enhanced accuracy, and 3 infrared VCSEL projectors for more photorealistic textures and better quality data. Its wide scanning area and adjustable working distance make it suitable for various scenes and objects, both small and large, in narrow or wide spaces. The EinScan H2 is an efficient 3D scanning tool that can revolutionize your workflow.

Introducing the EinScan I

Healthcare and Forensic

Cultural Heritage





Digital Art Design Education

SHINING 3D

Key Features





3 Infrared VCSEL Projectors





Data Acquisition Camera



5MP Texture Camera



White Light Projector

Photorealistic Texture





Superior Environmental Adaptability



3 VCSEL Projectors

Provide superior material and lighting adaptability, effortlessly handling various surface types and scanning environments.





Hybrid Light Source



Dual light sources improve scanning efficiency. LED light offers fast 3D scanning with accurate, high-quality data.

- · Various scenes from small to large
- · Scanning speed: 1,200,000 points/s
- · Accuracy: Up to 0.05mm
- · Point distance: Up to 0.2mm



Infrared VCSEL is ideal for capturing dark surfaces, for human body scanning, and for bright-lit environments.

- √ Dark color objects
- √Human body scan
- ✓Outdoor scan
- · Accuracy: Up to 0.1mm
- · Point distance: Up to 0.2mm







Ultra-wide FOV and Adjustable Working Distance

Adjustable working distance

Enables working distance adjustment from 200mm to 1500mm, to adapt to narrow or wide scenes and objects of various sizes.

FOV (Field of View) up to 780mm x 900mm

Offers flexibility in scanning volume to capture large-sized obje cts quickly.

Marker-free scanning

Scans rich geometric features without the hassle of markers.



· EinScan H2 Scanned Data

Optimized for Face and Body 3D Scanning

Flashless infrared technology

Ensures optimal comfort during face and body 3D scanning.





User-Friendly Design



Ergonomic design

The EinScan H2 is portable, easy to grasp, and intuitive to operate.

Remarkable scanning software

Delivers a professional easy-to-use 3D scanning interface with automated processing, intuitive UI design, and intelligent data quality indicators.





FootStation 2 Add-on

FootStation 2 for EinScan H2 accelerates and simplifies foot scanning by capturing instep and sole data simultaneously using a mirror, saving time with automatic alignment.

It suits application in foot orthopedics and the customized footwear industry.

EXModel

EXModel is a powerful bridge that simplifies CAD modeling from 3D scanning to manufacturing. With the integration of EXScan H, you can now seamlessly import data to EXModel with a single click after completing a scan. EXModel offers a comprehensive set of tools that enable you to create professional-grade CAD digital models that are compatible with your CAD software.



Effortless Mesh Processing




Precision CAD Creation



Enhanced Data Utilization



Cost-Effective Solution

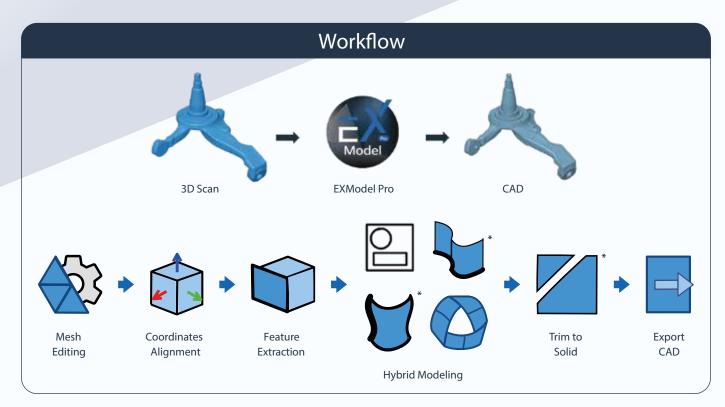

^{*30} days Free Trial is avaible to apply to EXModel.

^{*}Function features marked with asterisk are available in EXModel Pro.

TECHNICAL SPECIFICATIONS

EinScan H2

Scan Mode White Light Mode IR Mode

Light Source White LED Light, Visible Infrared VCSEL Light, Invisible

Scan Accuracy Up to 0.05mm Up to 0.1mm

Volumetric Accuracy 0.05mm±0.1mm/m 0.1mm±0.3mm/m

Point Distance 0.2mm-3mm

Best Working Distance 470mm

Effective working Distance Range200mm-700mm200mm-1500mmMaximum FOV420mm*440mm780mm*900mm

Scan Speed 1,200,000points/s 1,007.000points/s 1

Align Modes Markers Alignment, Feature Alignment, Feature Alignment, Hybrid Alignment, Hybrid Alignment, Texture Alignment, Texture Alignment, Global Markers

1,060,000points/s

Safety LED light (eye-safe) CLASS I (eye-safe)

Built-in Color Camera Yes

Texture Scan Yes

Software Included EXScanH; Solid Edge SHINING 3D Edition

Output Formats OBJ, STL, ASC, PLY, P3, 3MF
Size 108 mm*110 mm*237 mm

Scanner Body Weight 731.1 g

Operating Temperature Range $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Operating Humidity Range 10% RH ~ 90% RH

Certifications CE, FCC, ROHS, WEEE, KC

Interface USB 3.0

Input Voltage DC: 12 V, 5.0 A

Recommended Configuration OS: Win10/11, 64-bit; Graphics card: NVIDIA GTX/RTX, RTX2060 or better;

Video memory: ≥6GB; Processor: Intel I7-11700 or better; Memory: ≥64GB

Required Configuration

OS: Win10, 64-bit; Graphics card: NVIDIA GTX1060;

Video memory: ≥4GB; Processor: Intel I7-8700; Memory: ≥16GB



