

 PRECISE 3DM



SHINING 3D


OptimScan-5M Plus

High-Precision 3D Inspection system



OptimScan-5M Plus

OptimScan-5M Plus is High-Precision 3D Inspection scanner with narrow-band blue light source and upgraded high-resolution industrial lens, it provides better detail performance in scanning and smoother data quality. Three sets of high-resolution industrial lenses are used according to different size object, making it more flexible and adaptable. It is widely applied in reverse engineering, quality inspection and quality control.

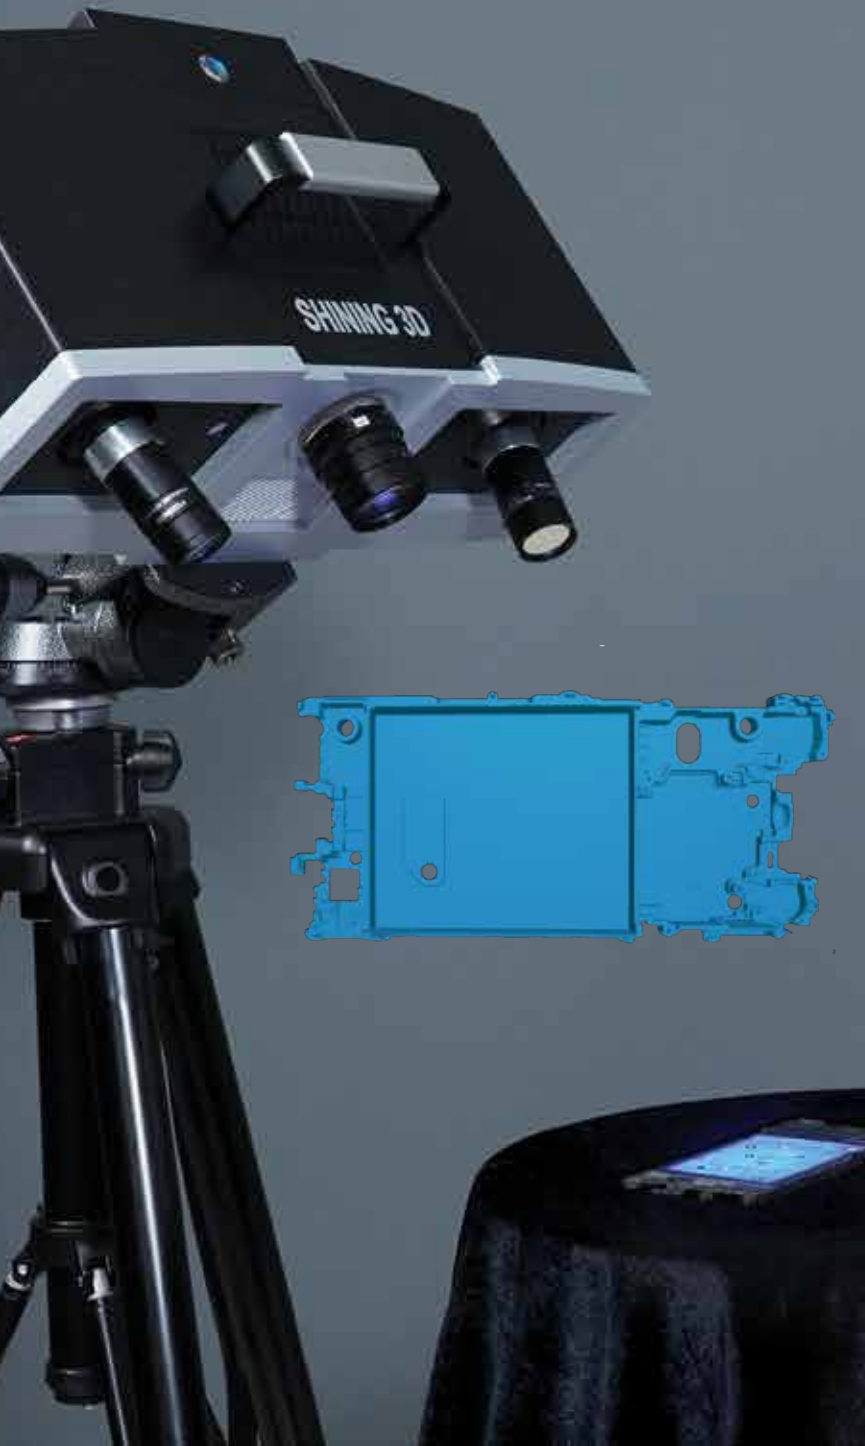

Product features



High Resolution

Three sets of 5 megapixel high resolution cameras and 1080P projection were used to obtain high precision features.



High Accuracy

Single shot accuracy can reach up to 0.005mm, scanner provides the function of environmental vibration detection and effectively ensure high quality data and precision.



Multiple Scan Range

The system realizes different scanning range by switching off different lenses to ensure a finer scanning performance.



HDR Function

The HDR function helps to scan high contrasted objects like black and white objects to get complete data.

Data Presentation





One-click Integration Module Function

The system integrates the "one-click" automatic markers alignment module and the GREC global deviation control module, which effectively reduces alignment errors and get high-quality data with high precision.



Compatible with Mainstream Software

Support Multiple data formats
Support mainstream reverse design or 3D inspection software

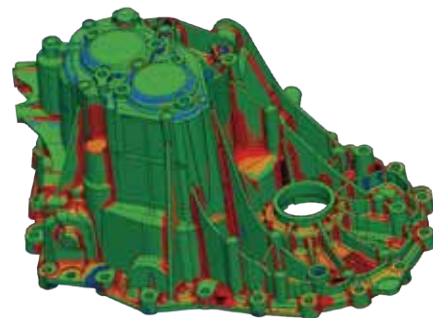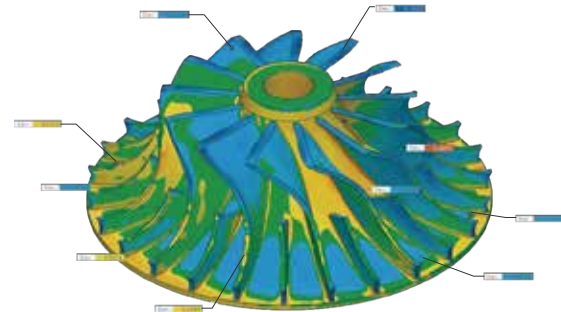

Workflow with third-party softwares

3D inspection process



Import Data

Support a variety of data model formats, compatible with data captured by various mainstream scanner and CAD digital data of various mainstream design software.



Alignment Compare

The RPS reference positioning system and the reference alignment function achieve high-precision automatic alignment. It can effectively ensure the accuracy of deviation analysis. Multiple deviation analysis functions can be used to meet the different needs.



Measurement Evaluation

it supports dimensions of ASMEY14.5GD&T tolerance and geometric. The software can also automatically calculate the deviation between reference and actual value, and get the accurate calculation result.



Generate Report

Automatically generate inspection reports based on predefined templates. Analysis images and calculation results can be quickly exported. It improves inspection efficiency



Reverse engineering process



Data Processing

Data processing method like align, optimize, merge, holes fill, simplify, and smooth can obtain high-quality triangular mesh models.



Feature Extraction

Automatically classify the mesh into different colored geometric regions based on curvature and features of the scan data, extract design parameters, and automatically create sketch profiles.



Exact Fit

Mesh-based fitting algorithms create NURBUS surfaces, easily and quickly creating 3D free-form bodies from free-form shapes of meshes.



CAD Conversion

Create CAD features, hybrid solid and surface models from scan data, it covers different objects to ensure model accuracy.



Technical specifications

| | | | |
|------------------------------------|---|-----------------|----------------|
| Product type | 5M Plus-400 | 5M Plus-200 | 5M Plus-100 |
| Single scan range | 400 mm x 300 mm | 200 mm x 150 mm | 100 mm x 75 mm |
| single shot accuracy | 0.015 mm | 0.01 mm | 0.005 mm |
| Point distance | 0.16 mm | 0.08 mm | 0.04 mm |
| Working distance | 560 mm | | |
| Camera Resolution | 5.0 MPx2 | | |
| Light source | Blue light (LED) | | |
| Scan speed | ≤1.5 s | | |
| Scan method | non-contact structure light scanning | | |
| Output Data Format | .asc、.stl、.obj、 etc., and compatible with the mainstream 3D software | | |
| Working temperature | 0° C ~ 40° C | | |
| Working humidity | 10% RH ~ 90% RH | | |
| Scanner weight | 6.8 kg | | |
| Size | 435 mm x 300 mm x 200 mm | | |
| Recommended computer configuration | Graphics card: NVIDIA GTX 1080 or above; Video memory: ≥4 G; Processor: above i7 8700; Memory: ≥32 GB; Port: USB 3.0 | | |

*Also compatible with all major metrology, CAD, and computer graphic software through mesh and point cloud import.

OptimScan-5M Plus-EN 20230605-V0.6



PRECISE 3DM
Digital Manufacturing Solutions



9840478347 | 6374410703



sm@precise3dm.com | sales@precise3dm.com



www.precise3dm.com



Chennai | New Delhi | Bangalore | Mumbai |
Varodhara | CBE | Pune | Indore